

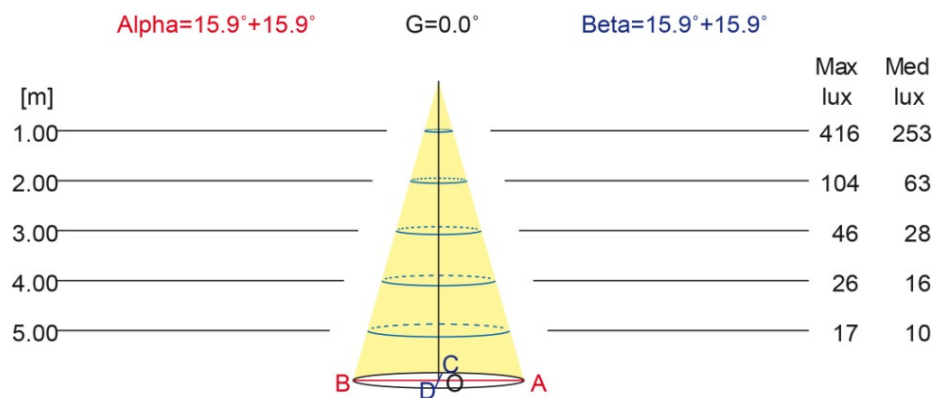


PRODUCTO: PROYECTORES LUMIPLUS MINI 3.13 RGB

PRODUCT: LUMIPLUS MINI PROJECTORS 3.13 RGB

RGB (MULTICOLOR - MULTICOLOUR)

Lámpara Lamp	Tensión nominal Rated voltage	Vatios Watts	Vida Lifespan	Temperatura de color Colour temperature	Cable Cable	Protección IP IP Protection	
LEDs	12 V AC	4 W (7VA)	70% del flujo luminoso a 50.000 70% of luminous flux at 50.000	-	H07RN-F 2x1 mm ²	IPX8	Operar únicamente con un transformador de seguridad. To be used only with a safety transformer




180.0 — 0.0
 270.0 — 90.0

Flujo / Flux
186 lm

Máximo/Maximum
2234.66 cd/klm


Posición / Position
C=0.00 G=0.00


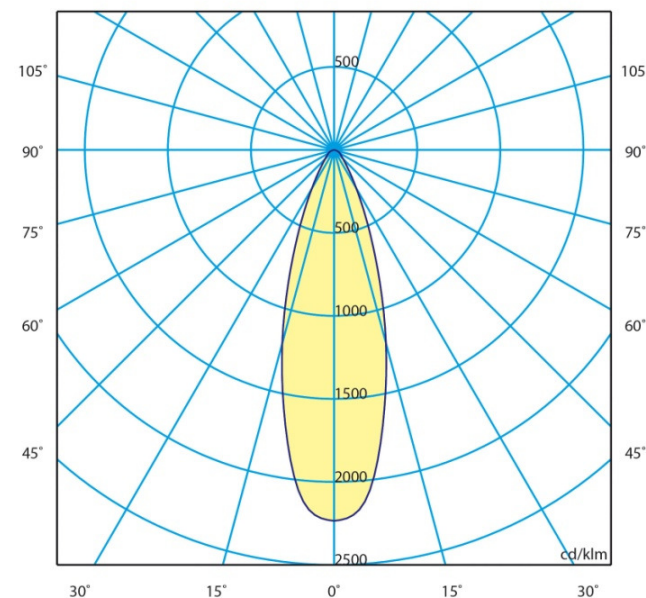


PRODUCTO: **PROYECTORES LUMIPLUS MINI 3.13 BLANCO**

PRODUCT: **LUMIPLUS MINI PROJECTORS 3.13 WHITE**

BLANCA - WHITE (MONOCOLOR - MONOCOLOUR)

Lámpara Lamp	Tensión nominal Rated voltage	Vatios Watts	Vida Lifespan	Temperatura de color Colour temperature	Cable Cable	Protección IP IP Protection	
LEDs	12 V AC	4 W (6VA)	70% del flujo luminoso a 50.000 70% of luminous flux at 50.000	6300 K	H07RN-F 2x1 mm ²	IPX8	Operar únicamente con un transformador de seguridad. To be used only with a safety transformer

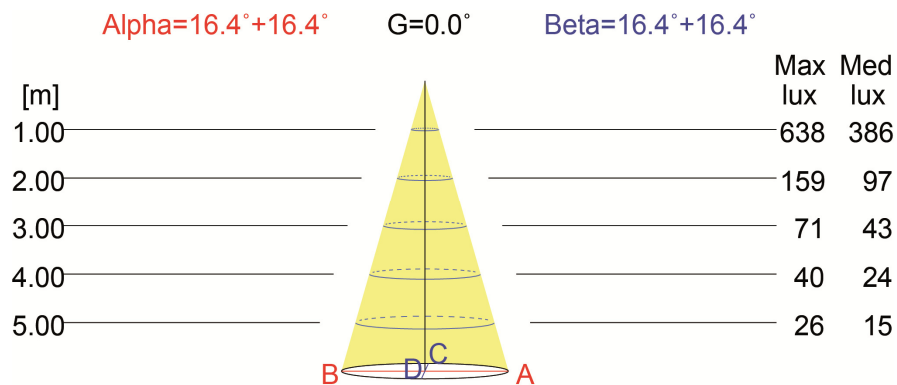

Semiplanos C
C Halfplanes


180.0 — 0.0

270.0 — 90.0

Flujo / Flux
315 lm

Máximo/Maximum
2023.95 cd/klm


Posición / Position
C=0.00 G=0.00

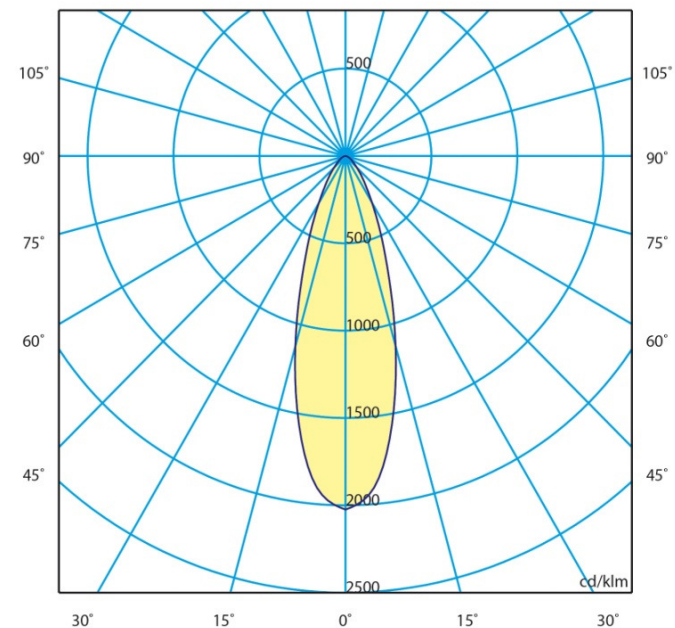

PRODUCTO: **PROYECTORES LUMIPLUS MINI 3.13 RGB DMX**

PRODUCT: **LUMIPLUS MINI PROJECTORS 3.13 RGB DMX**

RGB (MULTICOLOR - MULTICOLOUR) DMX

Lámpara Lamp	Tensión nominal Rated voltage	Vatios Watts	Vida Lifespan	Temperatura de color Colour temperature	Cable Cable	Protección IP IP Protection	
LEDs	24 V DC	4 W (4VA)	70% del flujo luminoso a 50.000 70% of luminous flux at 50.000	-	H07RN-F 2x1 mm ²	IPX8	Operar únicamente con un transformador de seguridad. To be used only with a safety transformer

